


LOCK RING PROFILES

RIMEX


Building better wheels

RIMEX EXCLUSIVE NOT INTERCHANGEABLE

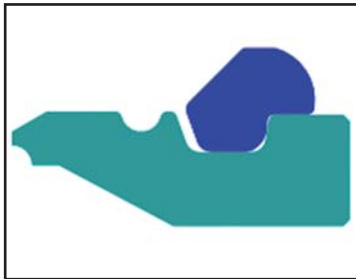

"EMH" Style

RIMEX 5 pc.
MES/TSR 25" - 29"

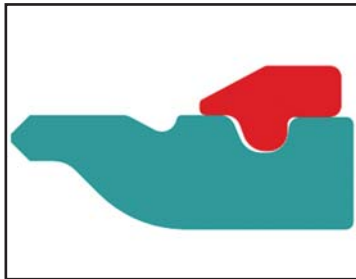

"TSR" Style

RIMEX 5 pc.
45" - 63"

For more information on lock ring configurations please call your local RIMEX representative or visit www.rimex.com

INDUSTRY STANDARDS - INTERCHANGEABLE



"T" Style

RIMEX 3pc. / 5pc. MES/FS 20" - 32"



"EM" Style

RIMEX 3pc. / 5pc. MES/FS 20" - 45"



"WI" Style

RIMEX 4pc. MES/I 20" - 24"



"EV" Style

RIMEX 5pc. MES/FS 33" - 49"



"INTEGRAL GUTTER DISC"

RIMEX 5pc. MES/EM 25"-29"



"HDT" Style

Standard 5pc. 51"-63"

** RIMEX standard 63" HDT lock ring is not interchangeable with Cat OE 797 (TOPY) 63" lock rings. Contact RIMEX for special application

CAUTION: Each lock ring requires use of proper mating parts. Ensure that correct gutter section and bead seat band are used. EV style lock rings and gutter sections should NEVER be used in a loader application. TSR LOCK RINGS SHOULD ONLY BE USED WITH TSR MATCHING PARTS.